
GAOKEview®

Smart Mobile Screen – Flexibility Redefined



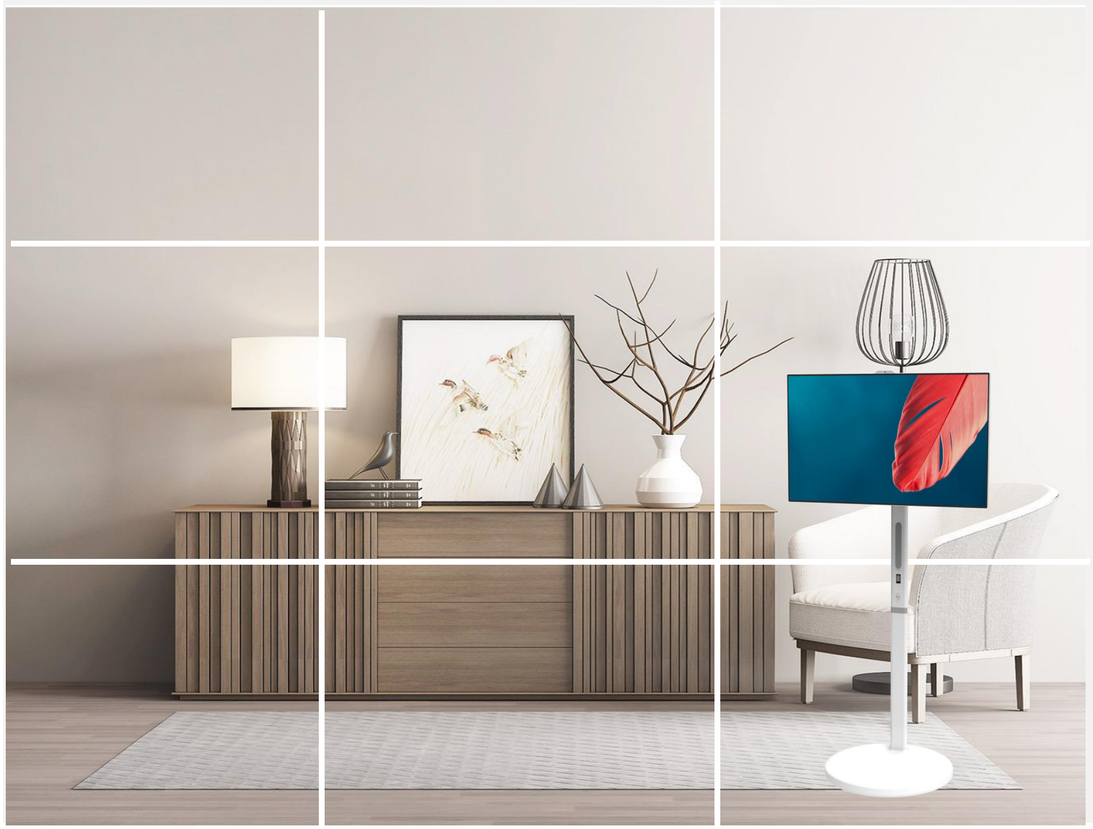

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Function Introduction

90° horizontal-vertical screen rotation



Screen pitch angle: 30 °

Screen elevation travel: 180mm



Maximum slope of adaptation

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Product brief introduction

GK-32R is a highly distinctive portable display product. It combines the characteristics of tablet computers and televisions, and adds features such as portability, mobility, and small size. This makes it suitable for a wider range of application scenarios, including living rooms, bedrooms, kitchens, balconies, and even outdoors. It can seamlessly integrate into the space. Additionally, the Android platform it is equipped with has excellent compatibility with apps, allowing it to directly integrate into the Android ecosystem.It is more suitable for various application scenarios than tablets and mobile phones. For instance, it can be used for exercising, watching movies and TV shows, watching short videos, and singing karaoke, etc.



learning | working | leisure | entertainment


GAOKEview®

Smart Mobile Screen – Flexibility Redefined


Function Introduction



Built-in Camera



USB | HDMI | 12VDC | External DC and battery power switch

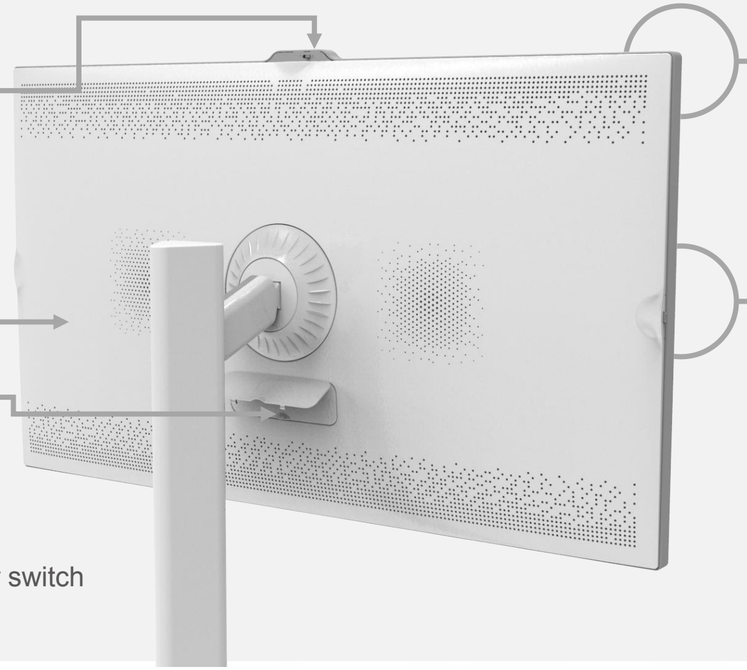



Four Equal Sides | G+G | 10-Point Touch




Power switch indicator, one-button start button

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Function Introduction

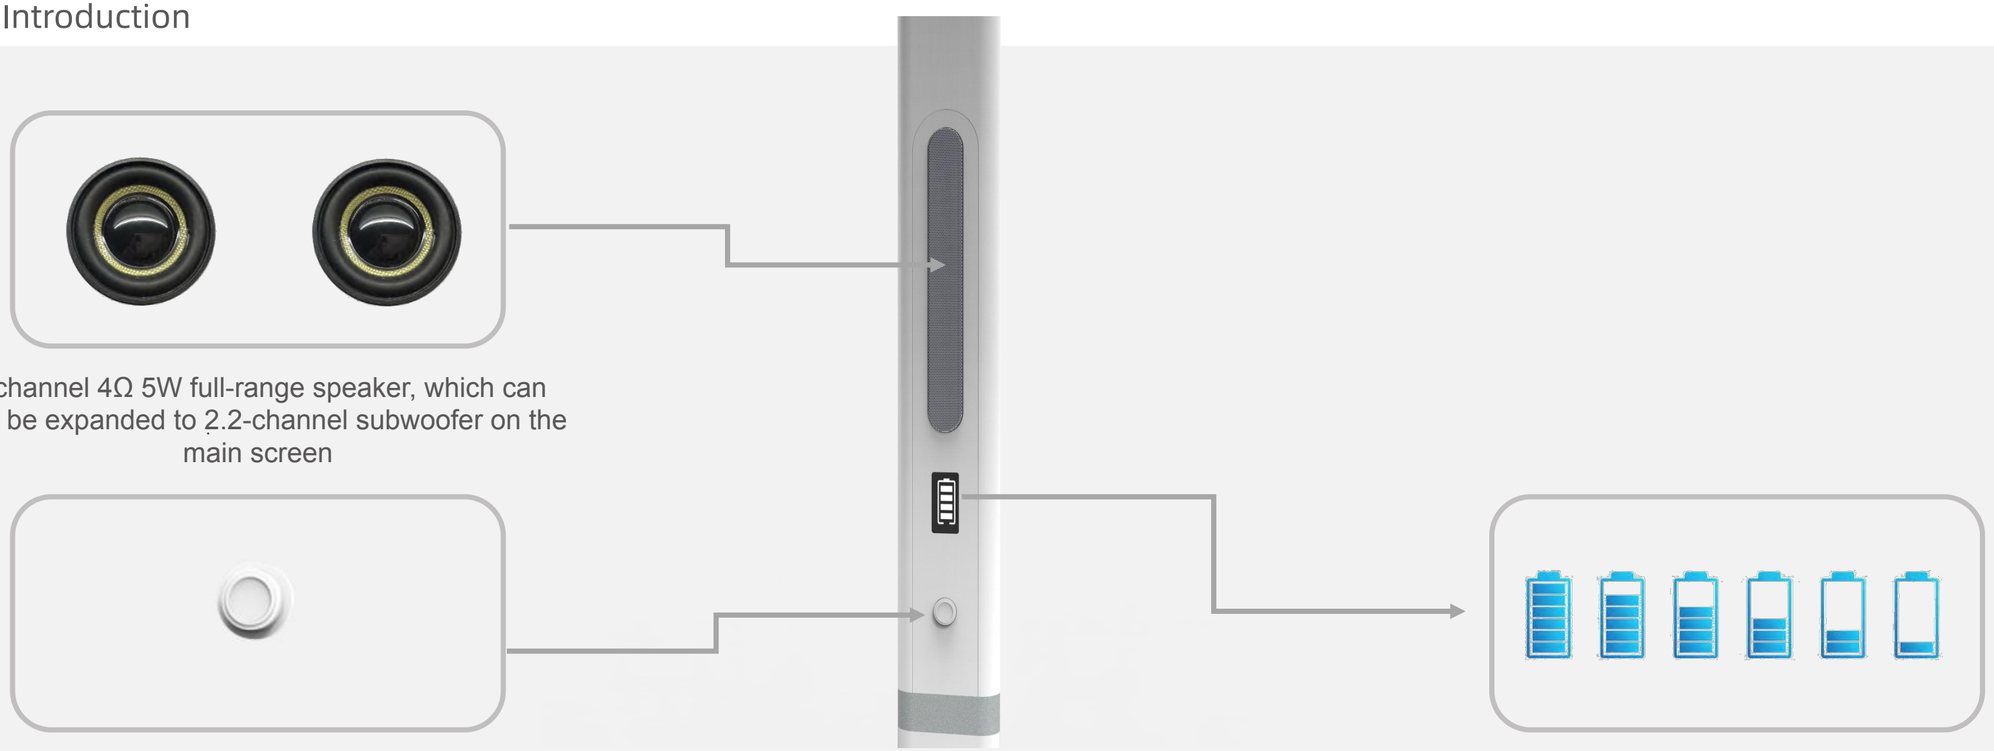

2-channel 4Ω 5W full-range speaker, which can also be expanded to 2.2-channel subwoofer on the main screen

Pre-installed power switch

64P * 128P OLED battery level display

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Function Introduction



PD-Type C charging port, with a standard power of over 100W (below 100W may only be sufficient for individual charging and startup)




Tool storage box: For storing installation wrenches





Lithium battery pack: 7800mAH,14.8V

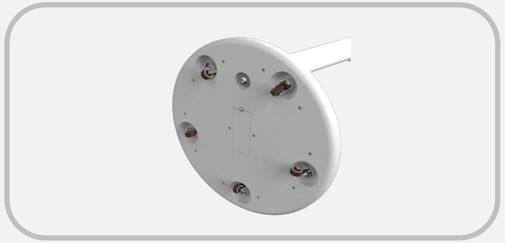


2.5-inch silent wheels, with an 8.5Kg weight added to the chassis

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Installation and Use

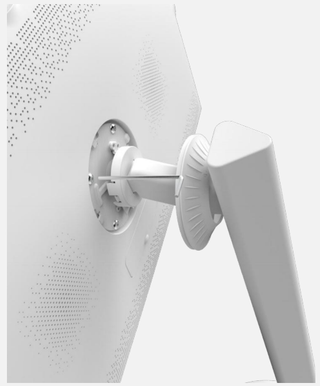

Place the turntable in the installation position of the display screen and tighten the screws with a medium-sized wrench.



Check whether the installation position is securely fastened, and whether the moving, lifting, and rotating mechanisms can operate smoothly.



Turn on the internal battery power switch, press the one-key start button, and then the device will start running.



Check whether the charging and discharging functions are normal, whether the touch screen operation is smooth, and whether the sound is clear.

GAOKEview®


Smart Mobile Screen – Flexibility Redefined

Function Introduction


After opening the outer box, take out the instruction manual and other accessories, check if all the accessories are complete, and read the instruction manual carefully.



Take out the installation tools from the chassis toolbox

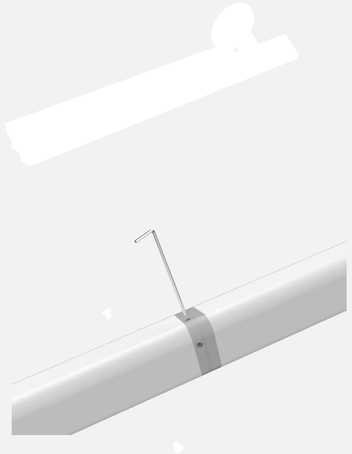

Open the folding bracket and use a wrench to tighten the fixed hexagonal screws.

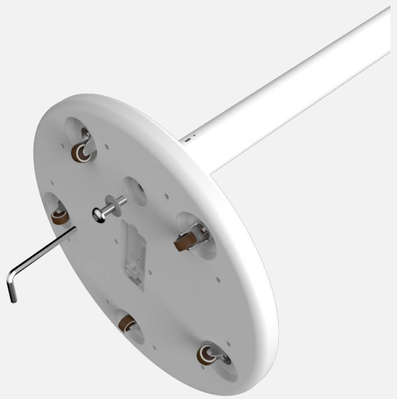


Install the bracket onto the chassis.


GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Specification parameter

GK-32R Shape and size specifications

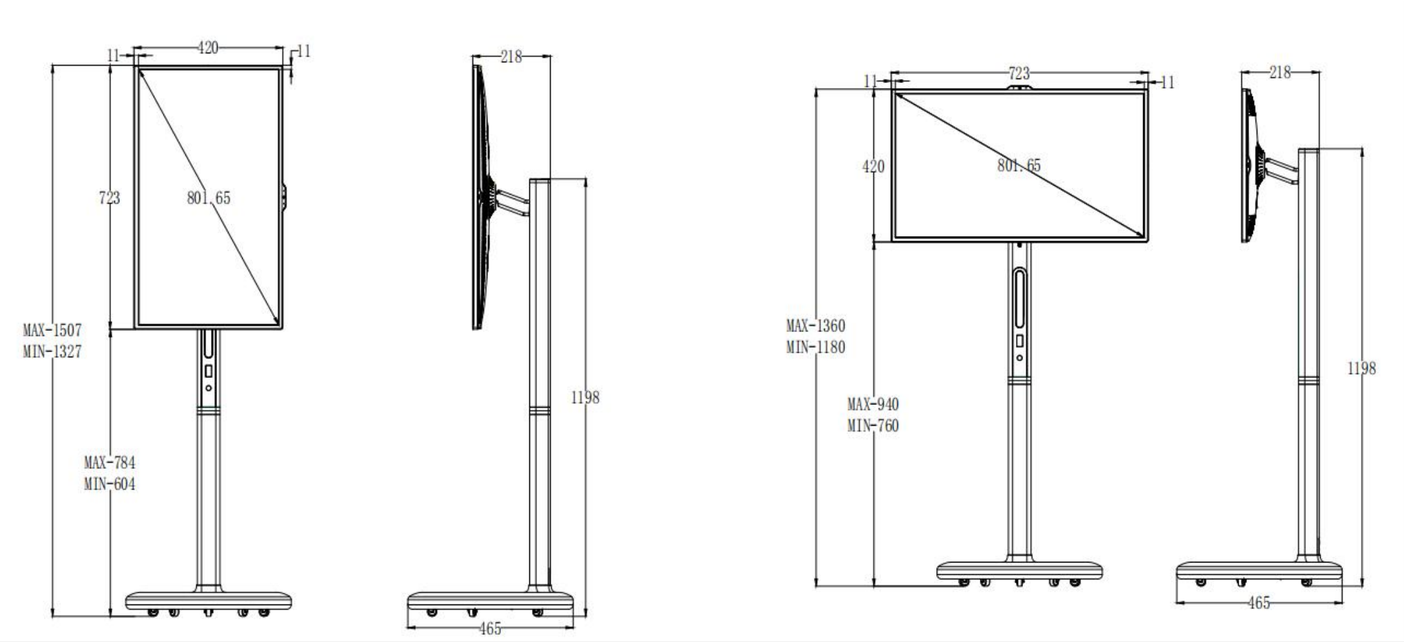

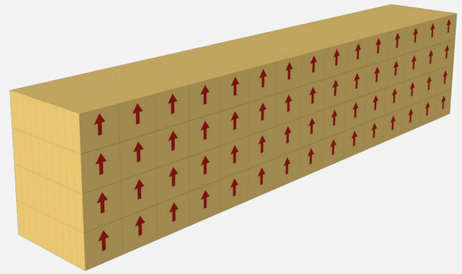

Maximum stacking layers: 4 layers
Unit volume:
795*670*200MM
Theoretical stacking volume:
11925*2680*2000MM
Theoretical stacking quantity:
15*10*4=600PCS

GAOKEview®

Smart Mobile Screen – Flexibility Redefined

Specification parameter

Product model	GK-32R
Display size	32inch
Display resolution	1920*1080
Screen brightness	300cd/m2
Operating system	Android13
CPU	octa-core Cortex-A73 +Quad-core Cortex-A53
GPU	ARM Mali-G72 MP3 700MHz
RAM	6G/8G
ROM	64G/128G
Multimedia	H.265/H.264/HEVC MPEG-4
Touch	Capacitive touch, 10
Remote control	Bluetooth remote

Battery capacity	7800mAH
Battery output voltage	14.8V
Battery charging voltage	9-20V
total power	28W
Screen rotation angle	Success needle90 °
Screen elevation movement range	180MM
Screen inclination angle	30° （±15°）
Maximum dumping angle	≤18°
N.W	18.5KG
G.W	21KG
Packaging dimension	795*670*200MM